



# PERFORMANCE SERIES ENCLOSED MOBILE TRAY CARTS

Single Door for 14"x18", 15"x20", 12"x19", 12"x20", and Room Service Trays


CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
ENCLOSED MOBILE TRAY CARTS

# SPECIFICATIONS

Printed in U.S.A. PSD 0816  
Carter-Hoffmann is a trademark of Carter-Hoffmann, LLC

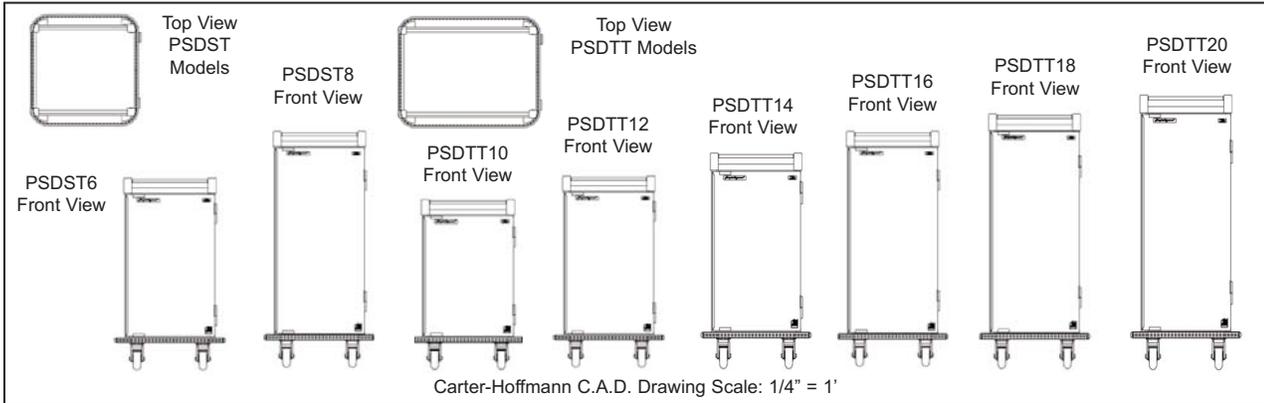

Model Number	Tray Capacity 5.25" Standard Spacing 1 tray/slide; end-loaded	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
				Height		Depth		Width					
				in	mm	in	mm	in	mm				
<input type="checkbox"/> PSDST6	6	31 <sup>5</sup> / <sub>8</sub>	803	47 <sup>5</sup> / <sub>8</sub>	1209	26 <sup>3</sup> / <sub>8</sub>	670	25 <sup>1</sup> / <sub>8</sub>	638	6	152	239	108
<input type="checkbox"/> PSDST8	8	42 <sup>1</sup> / <sub>8</sub>	1070	58 <sup>1</sup> / <sub>8</sub>	1476	26 <sup>3</sup> / <sub>8</sub>	670	25 <sup>1</sup> / <sub>8</sub>	638	6	152	252	114

Model Number	Tray Capacity 5.25" Standard Spacing 2 trays/slide; side-loaded	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
				Height		Depth		Width					
				in	mm	in	mm	in	mm				
<input type="checkbox"/> PSDTT10	10	26 <sup>3</sup> / <sub>8</sub>	670	42 <sup>3</sup> / <sub>8</sub>	1076	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	290	132
<input type="checkbox"/> PSDTT12	12	31 <sup>5</sup> / <sub>8</sub>	803	47 <sup>5</sup> / <sub>8</sub>	1209	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	318	144
<input type="checkbox"/> PSDTT14	14	36 <sup>1</sup> / <sub>4</sub>	921	52 <sup>7</sup> / <sub>8</sub>	1343	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	325	147
<input type="checkbox"/> PSDTT16	16	42 <sup>1</sup> / <sub>8</sub>	1070	58 <sup>1</sup> / <sub>8</sub>	1476	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	332	151
<input type="checkbox"/> PSDTT18	18	47 <sup>3</sup> / <sub>8</sub>	1203	63 <sup>3</sup> / <sub>8</sub>	1609	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	260	163
<input type="checkbox"/> PSDTT20	20	52 <sup>5</sup> / <sub>8</sub>	1337	78 <sup>5</sup> / <sub>8</sub>	1743	36 <sup>3</sup> / <sub>8</sub>	924	31 <sup>1</sup> / <sub>8</sub>	790	6	152	370	168

**CONSTRUCTION...** Completely welded cabinet construction. Ultra-quiet construction with sound-dampening features. Cabinet formed and welded to base. All seams turned in to eliminate raw edges. Drain plug with tether.

**VENTS...** Vents on both ends to allow escape of excess heat and moisture.

**TOP...** Marine edge top to contain spills. Three-sided top rail with red corners.

**CABINET MATERIAL...** Nickel-bearing type 300 series stainless steel; 18 gauge polished exterior walls.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters.

**CASTERS...** 6" Performa rubber casters with noise suppression bearing covers. Sealed roller bearing and double ball bearing swivel with cart wash resistant

Glacier FM grease. Plate mounted and bolted to base in offset wheel ahead pattern. Two swivel with brakes and two rigid.

**BUMPER...** Full perimeter, non-marking red vinyl bumper set in heavy-duty wrap-around 3/16" extruded aluminum frame with reinforced corner cut-outs.

**DOOR...** Double panel welded stainless steel door. Two pin hinges bolted to cabinet; hinged on right. Cavity filled with 1" thick high density fiberglass insulation. Full length integrated door handle with magnetic closure and magnetic door-open feature. 270 degree door swing.

**HINGES...** 12 gauge all stainless steel hinges with 3/8" pin.

**PUSH HANDLE...** On carts shorter than 52" (1321mm), the 3-sided top rail serves

as the push handle. On taller carts, two recessed 3/4" diameter tubular stainless steel handles are mounted vertically on each end for a total of four handles.

**TRAY RACK ASSEMBLIES...** Ultra-quiet with adjustable pin positions; assemblies are removable without tools and constructed of 18 gauge stainless steel. Welded-on tray slides with fixed standard spacing on 5.25" centers.

**ACCESSORIES/OPTIONS...**

- Pass-through
- 4-sided top rail
- Alternate caster sizes and types
- 2 or 3 thermal airpots with rack
- Mini-Dome chillable condiment bin
- Condiment organizer
- Menu card holder (specify 8.5"x11" or 5"x7")
- Dry erase board
- Anti-slip mat for top of cart
- Remove top rail

Specifications subject to change through product improvement & innovation.

**CARTER-HOFFMANN**

1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



## PERFORMANCE SERIES ENCLOSED MOBILE TRAY CARTS

*Since 1947, Foodservice Equipment That Delivers!*



**PSDTT10**

(shown with optional coffee & tea service)



**ULTRA-QUIET RACKS...** with adjustable pin positions to accommodate a variety of tray sizes. Tray spacing fixed on standard 5.25" centers.



### **DOUBLE PANEL DOOR...**

Insulated, flush mounted door with fully-integrated door handle and stainless steel hinges. 270 degree door swing with magnetic closure and door-open feature.

### **ULTRA-QUIET**

**CONSTRUCTION...** Sound-dampening features with corrosion-resistant 300 series stainless steel; easy to clean and structurally sound for long life.

### **STAINLESS STEEL HINGES...**

Heavy-duty, 12 gauge hinges with 3/8" diameter pin for trouble-free door operation. 270 degree door swing.



**PSDTT10**

### **VENTED END PANELS...**

Allow excess heat and moisture to escape, while maintaining highest food quality.

### **PERFORMA CASTERS WITH NOISE SUPPRESSION**

**BEARING COVERS...** 6" diameter industrial grade casters with non-marking red rubber cushioned tread. Rust resistant Delrin bearings with cart wash resistant Glacier FM grease. Long lasting and easy rolling, yet durable enough to withstand rigorous cart wash programs. Two fixed and two swivel casters for easy maneuvering.



### **WHEEL-AHEAD CASTER**

**CONFIGURATION...** Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces. Allow for easy handling and steering.

### **FULL PERIMETER BUMPER...**

Non-marking bumper set in heavy-duty 3/16" extruded aluminum frame. Floating style, bolted to the base. Protects cart and contents from impacts; protects doorways and walls from damage.

